


รางเก็บสายไฟคุณภาพสูง มาตรฐานยุโรป

CABLE DUCTS

(Wiring Channels)

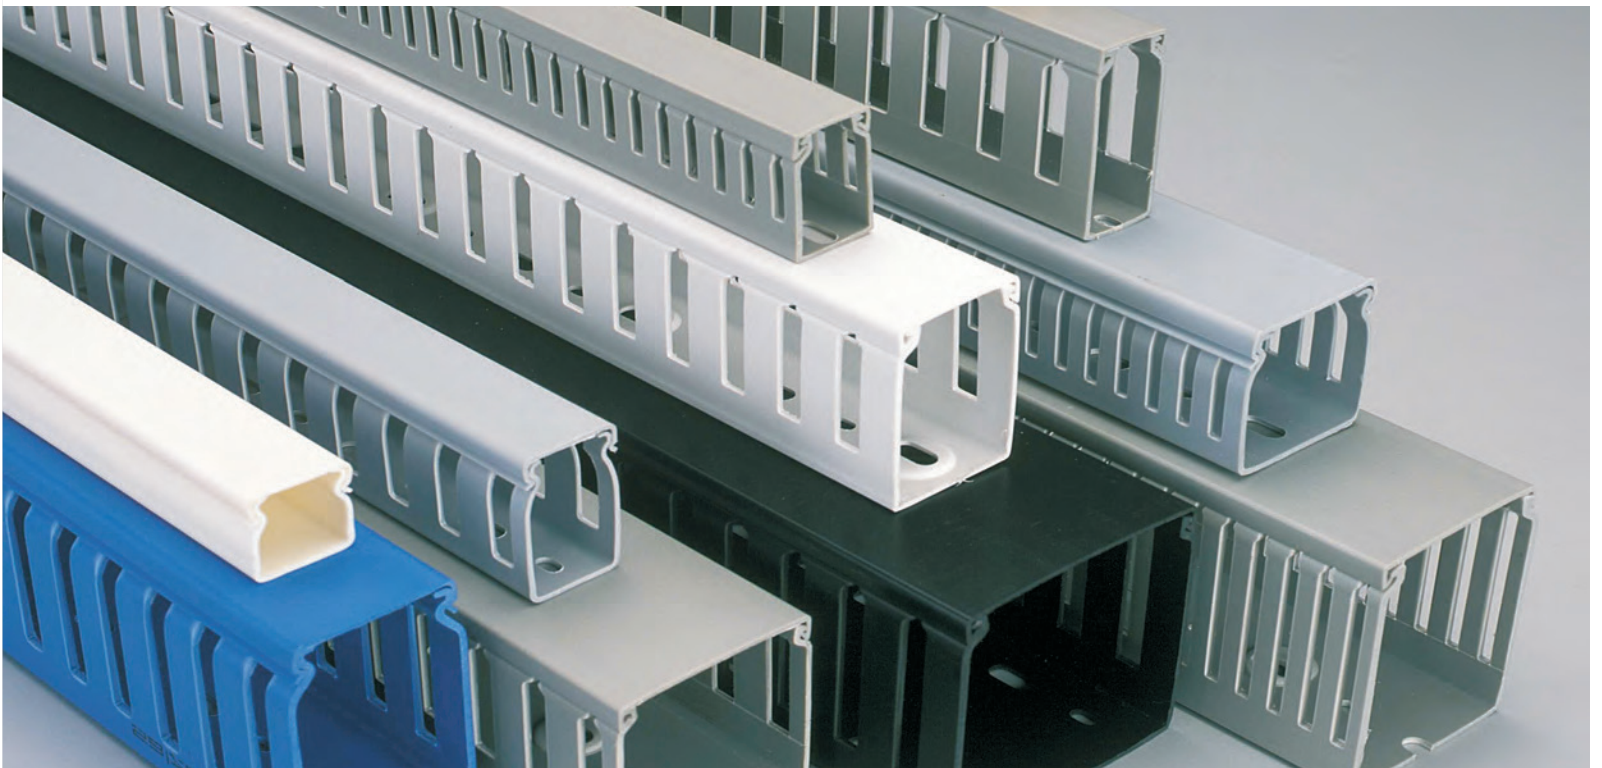

New
Halogen Free Ducts
RoHS Compliant Ducts

CABLE DUCTS

Features

Manufactured from specially compounded high-impact rigid polyvinyl chloride

Will not peel, chip or crack

Resists oil, salt solution and fungus

Nonflammable, warp-proof and Non-brittle

High dielectric strength and withstands temperature upto 60° C

Unique cover locking design prevents popping up of wires while removing cover

Elongated slots at the bottom allow flexible mounting

Heavy & robust sections

Material Specification

High impact, self extinguishing, Warp-proof rigid PVC

Other materials such as chlorine free PPO is available on request

Mechanical Properties

Tensile strength - 390 kg/cm²

Impact strength - 7 kg.cm/cm

Electrical Properties

Dielectric strength - 36 kV/mm

Specific resistance - 6.1 x 10¹⁴

Thermal Properties

Flammability - UL 94 VO **มาตรฐานทนการลุกไหม้ไฟสูงสุด V0**

Colour

Standard: Greenish grey for B type and light grey for A type

Other colours: Black, Ivory, White, Blue Green are available for large quantities

Applications

Facilitates systematic Wiring

Enhances aesthetic and clarity

Permits faster connections, addition and fault tracing of wires

Avoids bunching and tapping

Provides complete Electrical Insulation


CE marked

Slotting Styles (A & B Type)




RoHS


ได้มาตรฐาน RoHS ไม่มีสารอันตราย : ตะกั่ว,ปรอท,แคดเมียม,โครเมียม, โพลีโบรมิเนทไบฟีนิล,โพลีโบรมิเนทไดฟีนิลอีเทอร์




Unslotted (US)




Standard Slotted (S)




Straight Slotted (L)

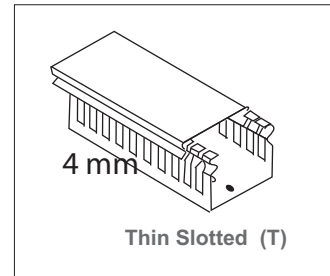


Thin Slotted (T)




Horizontal Slotted (H)



Circular Slotted (C)



Oblong Slotted (O)




Multiple Slotted (M)


Slotting Dimension

B Type


Standard Slot (S)



Thin Slot (T)




Oblong Slot (O)




A Type

Standard Slot



Thin Slot




STANDARD PROFILES

B Type Ducts




ฝาถอดได้แข็งแรงทน
ต่อการคั่นตัวของสายไฟ

Non slip cover design of minimum encumbrance and maximum grip



Snap-off side wall fingers permit enlarging slot for any size of wire or wire bundles Requires no tools for cutting



สามารถหักได้ง่ายเพื่อเพิ่มความกว้างของ Slot โดยไม่ต้องใช้

Cutting Tool


Size (W x H)mm	Part Number Slot 8 mm	Part Number Slot 4 mm	Packing 2 meter	Price list Bath / Pcs
25x30 mm	B25x30-8	B25x30-4	36	175
25x40 mm	B25x40-8	B25x40-4	36	206
25x60 mm	B25x60-8	B25x60-4	18	241
40x40 mm	B40x40-8	B40x40-4	18	241
40x60 mm	B40x60-8	B40x60-4	18	327
40x80 mm	B40x80-8	B40x80-4	18	353
60x100 mm	B60x100-8	B60x100-4	8	789
60x40 mm	B60x40-8	B60x40-4	12	327
60x60 mm	B60x60-8	B60x60-4	12	350
60x80 mm	B60x80-8	B60x80-4	12	408
80x100 mm	B80x100-8	B80x100-4	8	1143
80x60 mm	B80x60-8	B80x60-4	12	397
80x80 mm	B80x80-8	B80x80-4	12	665
100x100 mm	B100x100-8	B100x100-4	8	1243

เราสามารถผลิตได้ตามขนาดและสีที่ต้องการ

Maximum Stocking




Cover for Cable Duct

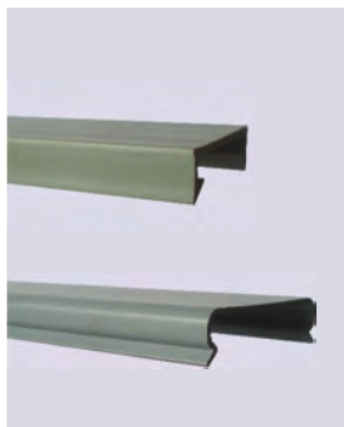

Cover Code For B Type Duct	Size (width in mm)	Standard Pack (Length in mtrs)	Price list Bath/Pcs
BC25	25	50	60
BC30	30	50	74
BC40	40	50	96
BC45	45	50	120
BC50	50	50	145
BC60	60	50	145
BC75	72	50	178
BC80	80	50	214
BC100	100	50	263
BC120	125	50	285
BC150	150	50	329



Cable Ducts Cutting Tool

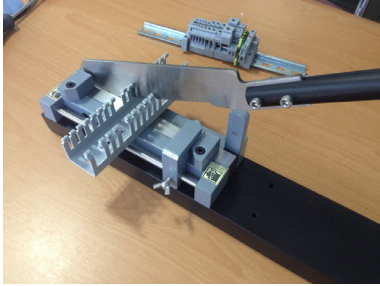

BCT2000
0-140 mm cutting
15,000 Bath

Din-Rail Cutting Tool







BCT3000
35x7.5x1 mm cutting
14,000 Bath

Colour Options




Colour	Code
Grey	13
Greenish Grey	33
White	18
Blue	25
Black	10
Ivory	31

Bottom Slotting Dimension

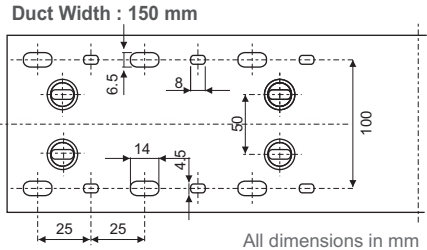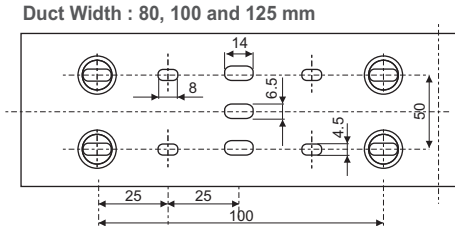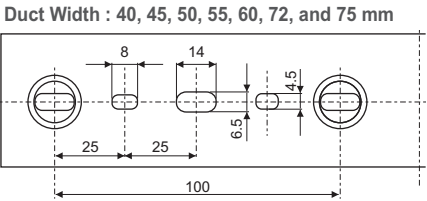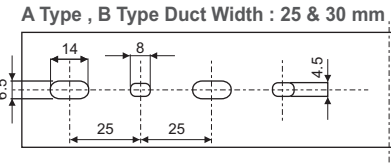


Cable Duct Accessories




FIXING LUG
BFL1 :15 Bath



WIRE RETAINER
BWR2 :18 Bath



NAME PLATE
BNP :38 Bath



CABLE TIE ATTACHMENT
BCT1 :15 Bath



MOUNTING CLIP
BMC2 :21 Bath



Steel Din Rail 35x7.5
D3575 : 230 Bath/2Mater



Mounting Bracket
MB35 : 27 Bath

ตัวแทนจำหน่าย